

Nelson & Nelson Mfg. 5210 Stadium Blvd, Suite C Jonesboro AR 72404 870-268-6393 : Cell 219-1019

Installation Instructions 3-20-24

Model SRT2019-DLB

Steps needed to install your RT Driving Light Bar. 2014-2019 RT Models




1.- DO NOT UNPLUG WIRES FROM THE BACK OF THE SWITCH!

First locate the plastic center cap below. Then remove that cap. This will show the hole the switch will be located.




2.- Take the suppled new switch cover and switch and run the wires from the switch through the plate as shown below.

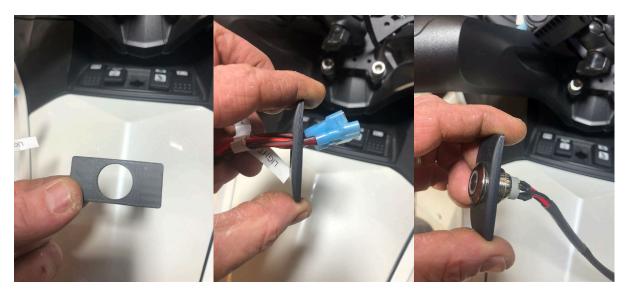


3.- Take the switch and remove the adhesive tap from the back of the switch face plate. Be sure to clean the area around the hole where the switch plate will set. Remove the right speaker grill and run the switch wires down through the hole and retrieve them in the speak area as shown below. Remove the tape backing, Insert the switch in the hole and press down on the switch plate to secure in position.



4.- Remove the right-side access panel shown below. If you have never removed this panel, it may be snug so apply pressure to remove. Using a long wire or wire tire as a guide run the switch wire down to come out of the panel area as shown below. This is where you will connect the power cable from the accessory location next to the battery and the light bar wire. You will connect all wires to switch here last.

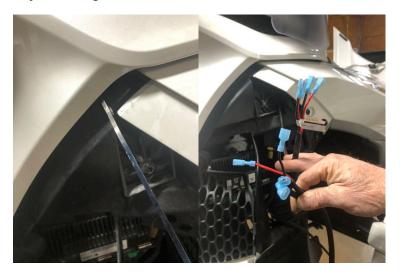

5.- Next take the supplied power wire and run that wire down below from the open panel area above to the back of the front trunk to the battery area. Once the wire is run to the battery area in the trunk run the wire along the top of the battery and then to the right of the battery locate the factory accessory wires as shown below. Brown/Yellow Positive and Black Negative. Connect the brown / yellow to the red power cable wire and black to black. Next install the light bar with the supplied screws and washer each screw. Adjust the bar to your liking and you can do a final adjustment at night. Run this wire up to the panel area above. This LED Light bar wire should run between the skid plate and the body. You will see areas to run the wire to the upper open panel area.

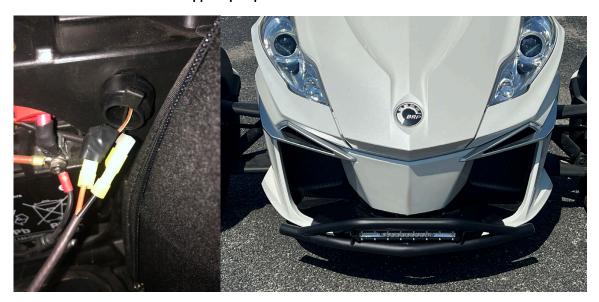

6.- Once the switch wires, suppled power & LED Light bar wires are run to this one location, plug all wires into the switch based on how they are labeled. Besure to connect red to red / black to black. Take the supplied wire ties and tie up the wires as shown. Now you need to test the light bar. Turn on the Key Switch and go through the motions of powering up the Spyder. Once done push the switch to make sure the light is working.



7.- Then reinstall the speaker grill and lower panels, opposite direction as you uninstalled them.

At night you can adjust the light bar to shine forward and down as the illumination is bright and this position will light up the road.

Your new LED Light bar is now installed.

We thank you for purchasing one of our LED Light Bar Kits for the 2019 Down RT Models. Today we know the need for accessories for your Spyder and we have solved that demand with a stylish system that compliments the design of your Spyder®!