



Nelson & Nelson Mfg.
5210 Stadium Blvd, Suite C
Jonesboro AR 72404
870-268-6393 : Cell 219-1019


Installation Instructions 6-17-25

Model CAN-SCHLDER

**Steps needed to install your Canyon Side mounted Cup Holder. For
2025+ Canyon Models**



1.- First with a t-25 Torx wrench remove these two OEM screws. Next take the cupholder if mounted on the drivers left side as shown here and take the longer supplied screw and spacer on top and the smaller screw and spacer on bottom and place the cup holder as shown below. The lower shorter screw mounts through the cup holder & lower bracket hole first then which allows the cup holder to rotate. The upper longer screw and spacer mounts the mounting bracket alone.

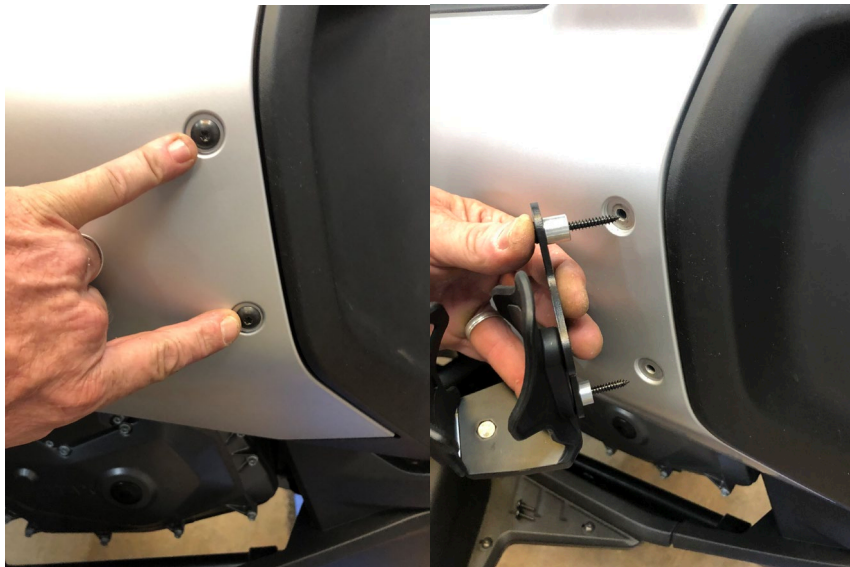

**2.-Once mounted, you have 3 positions for the cup holder. Stright up or rotate it towards the rider in 2 other positions, shown below. You can adjust the cup holder using a 3mm Allen Wrench.
If mounted on the right side, you install the same but flip the mounting bracket to allow the same rotating position for the cup holder.**



We thank you for purchasing one of our Canyon Cup Holders. Today we know the need for accessories for your Canyon, and we have solved that demand with a stylish system that compliments the design of your Canyon®!

spyderextras.com